



# ICE251

Electric Counterbalance Forklift Truck 2.5T

- Compact size
- High strength components
- Lithium-ion technology
- Telematics
- Low TCO

iMOW  
www.imowshop.com



Scan and Enter iMOW Website

iMOW

**NARA ENTERPRISE CO.,LTD**  
HEAD OFFICE

110/59 Pruksa Avenue Moo.4 Bangkaew, Bangphli, Samut Prakarn 10540  
Thailand

Tel : +662-007-6595

Hotline : +6692-445-4291/ +6683-666-4594

www.naraenterprise.com      Email : info@naraenterprise.com

## PRODUCT FEATURES


### ■ Lithium-ion technology

ICE251 adapts LFP Li-ion battery that prevents the battery from self-ignition and ensures safety operation. It supports opportunity charging so it can be charged at preferable time during the day without disrupting working schedules.



### ■ Low TCO

Comparing to a diesel forklift truck, ICE251 saves 30%-50% of energy cost with li-ion technology. And there is no maintenance fee with no air filter, oil filter, engine oil or starter battery installed on the truck.

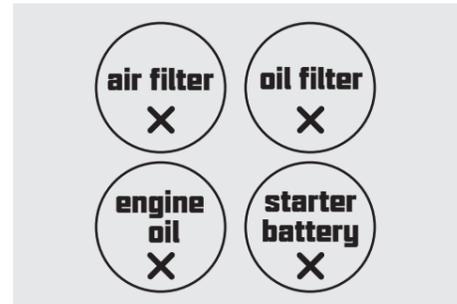

### ■ Compact size

The overall length of ICE251 is 3573 mm that is 5% more compacted in size than a regular IC forklift to be used in narrow aisle.



### ■ High strength components

ICE251 features its high strength mast and tapered roller steering axle for better stability and endurance. The truck is able to be operated outdoors, even on uneven road to perform heavy duty tasks.



steering axle

mast

### ■ Telematics

ICE251 offers EP' s latest Telematics. It provides the following features to facilitate your feet management:

- Truck location in real-time
- Reports of truck usages and diagnosis
- Li-ion battery condition analytics
- Updates on card access registration




## PRODUCT PARAMETERS

Distinguishing mark			
1.1	Manufacturer		IMOW
1.2	Model designation		ICE251
1.3	Drive unit		Electrics
1.4	Operator type		seated
1.5	rated capacity	Q	kg 2500
1.6	Load center distance	c	mm 500
1.8	Load distance, centre of drive axle to fork	x	mm 495
1.9	Wheelbase	y	mm 1595
Weight			
2.1	Service weight (include battery)		kg 3770
2.2	Axle loading, laden driving wheels /steering wheels		kg 5490/780
2.3	Axle loading, unladen driving wheels /steering wheels		kg 1450/2320
Types,Chassis			
3.1	Tyre type,driving wheels /steering wheels		pneumatic
3.2	Tyre size, driving wheels		7.00-12-12PR
3.3	Tyre size, steering wheels		6.00-9-10PR
3.5	Wheels, number driving/steering (x=drive wheels)		mm 2x/ 2
3.6	Tread, Driving wheels	b10	mm 970
3.7	Tread, Steering wheels	b11	mm 975
Dimensions			
4.1	Tilt of mast/fork carriage forward/backward	$\alpha / \beta$ (°)	6/ 10
4.2	Height, mast lowered	h1	mm 2060
4.3	Free lift (load backrest)	h2	mm 140
4.4	Lift height	h3	mm 3000
4.5	Height, mast extended	h4	mm 4050
4.7	Height of overhead guard (cabin)	h6	mm 2160
4.8	Seat height	h7	mm 1095
4.12	Tow center of pin height	h10	mm 435
4.19	Overall length	l1	mm 3573
4.20	Length to face of forks	l2	mm 2503
4.21	Overall width	b1/ b2	mm 1154
4.22	Fork dimensions	s/ e/ l	mm 40x125x1070
4.23	Fork carriage class/type A, B		2A
4.24	Fork carriage width	b3	mm 1090
4.31	Ground clearance, laden, below mast	m1	mm 100
4.32	The minimum ground clearance of frame	m2	mm 150
4.34.1	Aisle width for pallets 1000 × 1200 crossways	Ast	mm 3985
4.34.2	Aisle width for pallets 800 × 1200 lengthways	Ast	mm 4195
4.35	Turning radius	Wa	mm 2290
Performance data			
5.1	Travel speed, laden/ unladen	km/ h	11/12
5.2	Lifting speed, laden/ unladen	m/ s	0.28/0.37
5.3	Lowering speed, laden/ unladen	m/ s	0.45/0.5
5.8	Max. gradeability, laden/unladen	%	15/15
5.10	Service brake type		Hydraulic / Mechanical
	park brake type		Mechanical
Electric-engine			
6.1	Drive motor rating S2 60 min	kW	10
6.2	Lift motor rating at S3 15%	kW	12
6.3	The maximum allowed size battery	mm	731X608X326
6.4	Battery voltage/nominal capacity K5	V/ Ah	80V/205AH
Battery weight			
8.1	Type of drive unit		AC
10.5	Steering type		Hydraulic steering
10.7	Sound pressure level at the driver's ear	dB (A)	< 74

## RATED CAPACITY



### RATED CAPACITIES

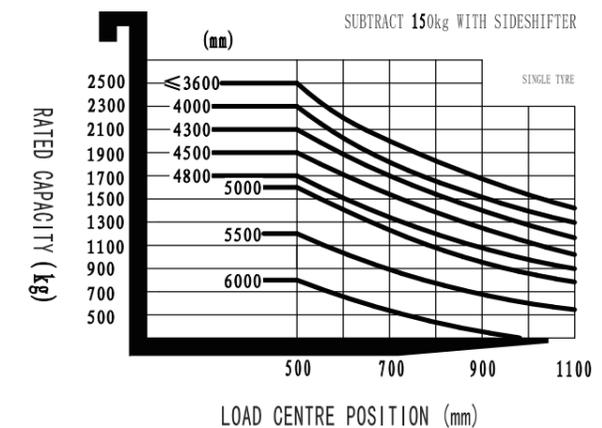

# MAST OPTION

Type	Model	Max. fork height	Overall height				Free lift		Front Overhang	Tilt range		Capacity	
			Lowered	Extended		Without backrest	With backrest	FWD		BWD	Load capacity at 500 mm		
				Without backrest	With backrest						Single tire	Double tire	
				2.5t							2.5t		
mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg			
Wide view mast	2W200	2000	1495	2565	3025	140	140	495	6	10	2500	2500	
	2W250	2500	1745	3065	3525	140	140	495	6	10	2500	2500	
	2W270	2700	1845	3265	3725	140	140	495	6	10	2500	2500	
	2W300	3000	2060	3565	4025	140	140	495	6	10	2500	2500	
	2W330	3300	2145	3865	4325	140	140	495	6	10	2500	2500	
	2W350	3500	2245	4065	4525	140	140	495	6	10	2500	2500	
	2W360	3600	2295	4165	4625	140	140	495	6	10	2500	2500	
	2W400	4000	2545	4565	5025	140	140	495	6	10	2300	2500	
	2W430	4300	2695	4865	5325	140	140	495	6	6	2100	2350	
	2W450	4500	2795	5065	5525	140	140	495	3	6	1900	2250	

# LINE GRAPH

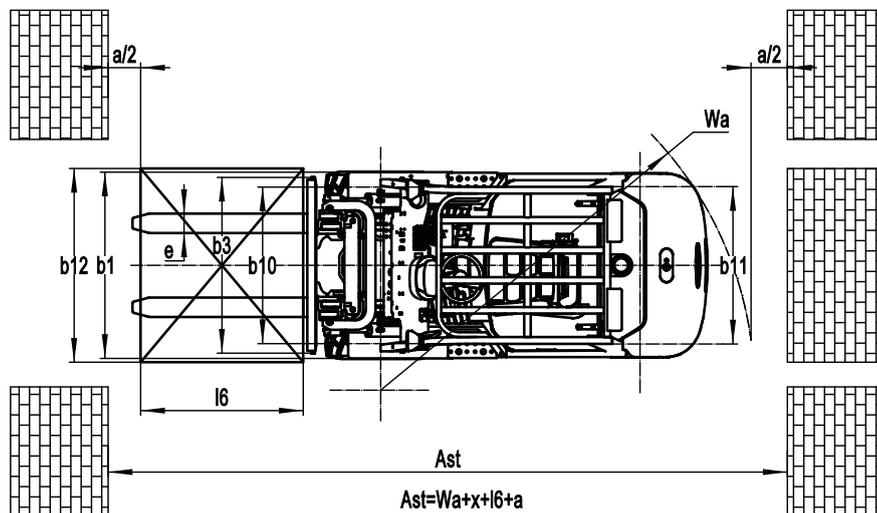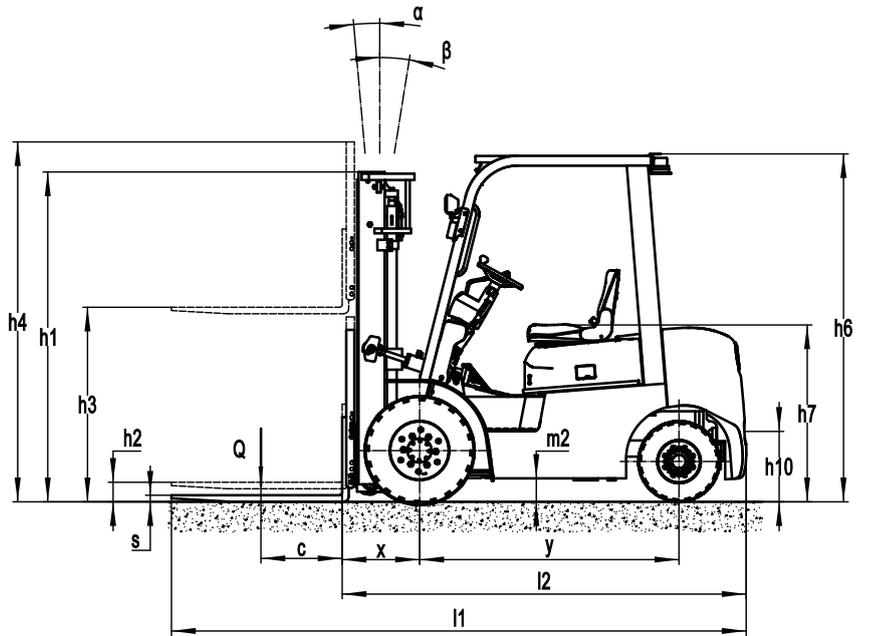

# OPTION

Optional items		ICE251
1	Fork length	●1070○customization consultation
2	Attachments	●NA○integrated side shifter○external side shifter ○customization consultation
3	Overhead guard	●normal overhead guard ○customization consultation
4	Front wheel configuration	●single○dual
5	Tyre type	●pneumatic○Solid rubber tire ○Environmental solid tire
6	Front light	●Front light
7	Auxiliary light	●NA○Back light
8	Safety components	●NA○Fire extinguisher○blue light
9	Seat	●normal seat○suspension seat
10	Cockpit	●NA○Cockpit○With fan heater○With front windshield wiper○With rear windshield wiper
11	Rearview	●single○dual
12	Air fan	●NA○single
13	Charging	●80V65A○80V100A
14	Li-Ion battery	-

Note: ● standard ○ option — NA